


Spacer Ø 20/50

Matches rod holder No. **30921-1000-01**

AISI 316 material group

Part No.	b mm	c1 / c2 mm
30919-0058	58	Variable
30919-0075	75	Variable
30919-0100	100	Variable

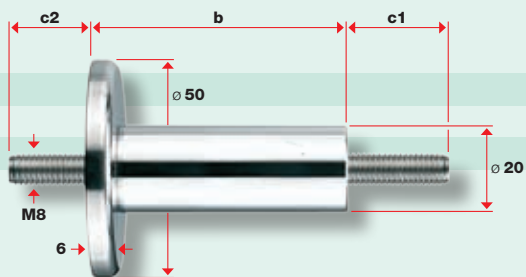


Support washer with threaded rod

Support washer with internal thread M8

AISI 316 material group

Part No.	c1 / c2 mm
30919-0050-01	Variable



Lake of Geneva/Montreux (Switzerland)

Removable floating debris barrier

- Webnet rope Ø 3.0 mm, mesh aperture 50 mm
- Fully strung tubular frames




Eye nut

With internal thread M8, DIN 582

AISI 316 material group

Part No.

30838-0800

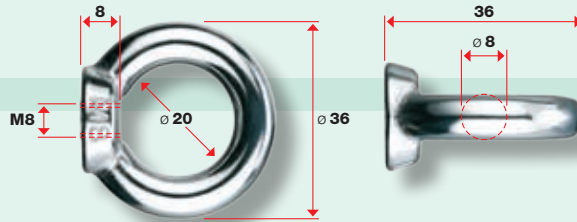

Quick coupling for suspension rope Ø 6 and 8 mm

Load data not guaranteed

AISI 316 material group


Part No.

30895-0700

Permissible load

kN

5

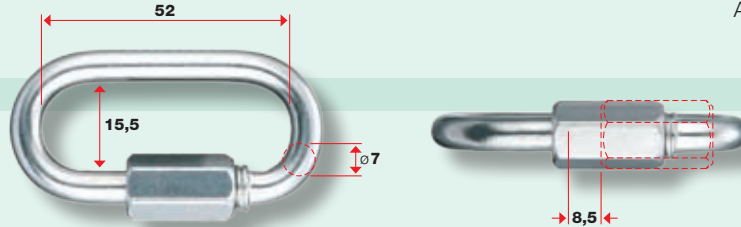

Webnet clip

Compatible with Webnet rail

AISI 316 material group

Part No.

30925-0001

For rope ø

mm

1.0 – 1.5

b

mm

15.5

h

mm

12

k

mm

8


30925-0002

2.0 – 3.0

15.5

12.5

8

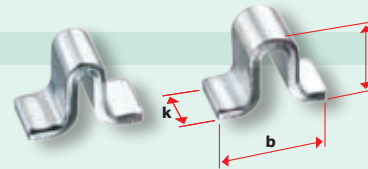

Webnet C rail

Compatible with Webnet clip

AISI 301–304 material group

Part No.

30925-0010

b

mm

max. 2500

Typ

A Webnet C rail

30925-0011

max. 2500

B Countersunk hole, ø 5.5 mm (positions according to your specifications)

30925-0012

max. 2500

C Welded flange (positions according to your specifications)

30925-0013

max. 2500

Separate flange

30925-0014

max. 2500

D Welded stud (positions according to your specifications)

30925-0015

max. 2500

Separate stud

20800-0002

Costs for cut

